



FUZE PAR Z60 IP™

SKU# FUZ001

The IP65 rated FUZE PAR Z60 IP™ is a single source silent operating par luminaire with a 60W Quad Color RGBW COB LED. Features 7° to 39° motorized zoom, RGBW color mixing, electronic strobe and selectable dimming curve effects, DMX and RDM (remote device management) protocol support, IP rated 5pin XLR and powerCON TRUE1 in/out connections, LCD menu display with 4 touch button control panel, dual adjustable yokes, multiple unit power linking, flicker free operation for TV and FILM, a multi-voltage universal auto switching power supply (110-240v), and removable gel frame and barn doors included.



FEATURES

IP65 Rated

60W RGBW COB LED Par Luminaire

7° to 39° Motorized Zoom Range

Silent Operation

RGBW Color Mixing

Dual Adjustable Yokes

Multiple Unit Power Linking

Flicker Free Operation for Broadcast TV and FILM

Removable Gel Frame and Barn Doors Included



ELATION | FUZE PAR Z60 IP™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional 08/05/16

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

SOURCE

60W RGBW COB LED
100,000 Hour Average LED Life*

*LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

3,813 LUX 354 FC @9.8' (3m) (7° Full ON)
228 LUX 21 FC @9.8' (3m) (39° Full ON)

EFFECTS

RGBW Color Mixing
7° - 39° Beam Zoom Range
Electronic Strobe and Dimming
Variable Dimming Curves
64 Color Presets and 14 Unique Color Macros

COLOR

RGBW

CONTROL / CONNECTIONS

(12) DMX Channel Modes (13 Total Channels)
RDM (Remote Device Management)
(4) Button TouchControl Panel
IP Rated 5pin DMX In/Out
powerCON TRUE 1 In/Out

SIZE / WEIGHT

Length: 10.0" (253mm)
Width: 9.9" (252mm)
Vertical Height: 11.1" (282mm)
Weight: 10 lbs. (4.5 kg)

ELECTRICAL / THERMAL

AC 110-240V - 50/60Hz
78W Max Power Consumption
Multiple Unit Power Linking
5°F to 113°F (-15°C to 45°C)

INCLUDED ITEMS

powerCON TRUE1 Power Cable
Gel Frame
Barn Door

APPROVALS / RATINGS

IP65

PHOTOMETRIC DATA


MIN ZOOM - 7° Beam Diameter

	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
7° Beam Diameter	0.3	1.0	0.39	1.3	0.47	1.5
12° Field Diameter	0.56	1.8	0.74	2.4	0.91	3.0
	lux	fc	lux	fc	lux	fc
RED LEDs	833	77	523	49	347	32
GREEN LEDs	1,182	110	717	67	432	40
BLUE LEDs	316	29	188	17	122	11
WHITE LEDs	1,762	164	1,068	99	721	67
FULL ON	3,813	354	2,321	216	1,538	143

MAX ZOOM - 39° Beam Diameter

	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
39° Beam Diameter	2.16	7.1	2.89	9.5	3.61	11.8
43° Field Diameter	2.45	8.0	3.27	10.7	4.1	13.5
	lux	fc	lux	fc	lux	fc
RED LEDs	60	6	36	3	25	2
GREEN LEDs	75	7	44	4	31	3
BLUE LEDs	24	2	15	1	12	1
WHITE LEDs	107	10	64	6	44	4
FULL ON	228	21	135	13	88	8

DIMENSIONAL DIAGRAMS

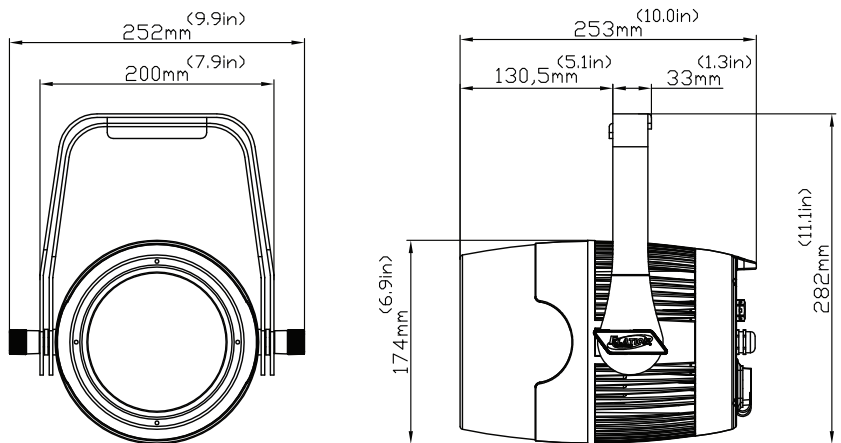

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
NEU088	3 ft. (1m) PowerCON TRUE1 Power Link Cable
	Additional cable lengths available



Specifications are subject to change without notice ©Elation Professional 08/05/16

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu