


PLATINUM SBX™

SKU# EPB600




Photometric Data

Specifications are subject to change without any prior written notice.

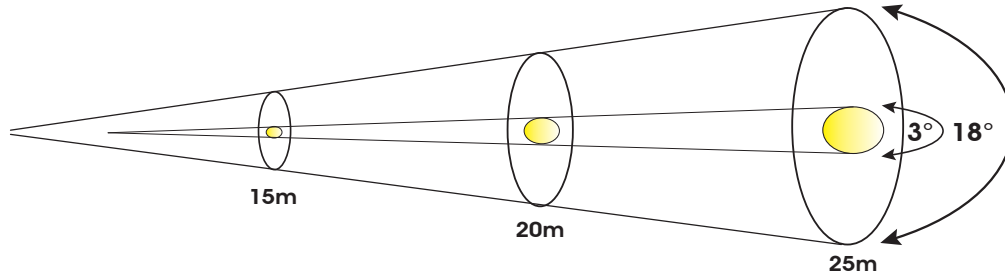

Beam Mode	m	ft	m	ft	m	ft
Distance	15	49.2	20	65.6	25	82.0
3° MIN Diameter	0.84	2.8	1.12	3.7	1.4	4.6
18° MAX Diameter	4.76	15.6	6.34	20.8	7.93	26.0
Photometrics	lux	fc	lux	fc	lux	fc
3° MIN FULL ON	107,000	9,940	64,220	5,966	41,960	3,898
18° MAX FULL ON	4,147	385	2,435	226	1,620	150

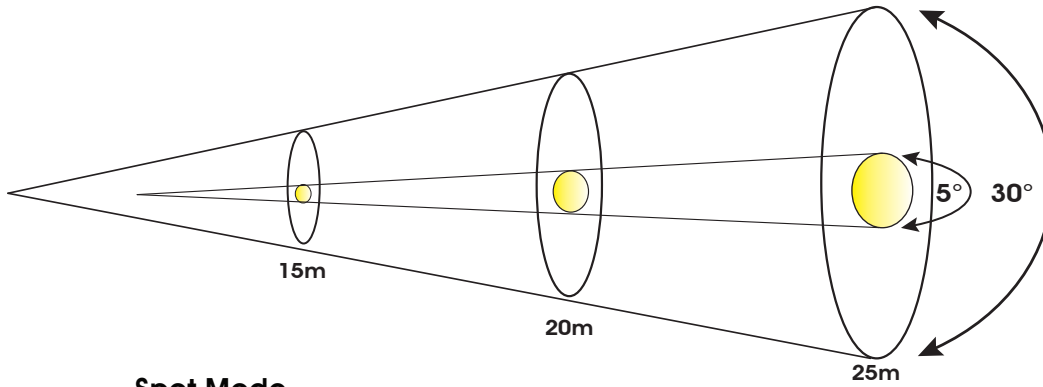

Spot Mode	m	ft	m	ft	m	ft
Distance	15	49.2	20	65.6	25	82.0
5° MIN Spot Diameter	1.38	4.5	1.84	6.0	2.3	7.5
30° MAX Spot Diameter	7.88	25.9	10.5	34.4	13.13	43.1
Photometrics	lux	fc	lux	fc	lux	fc
5° MIN FULL ON	5,133	477	2,953	274	1,970	183
	210	20	125	12	85	8

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu