

K&F SONA 6

- 2-way passive system with bass reflex tuning
- Precise directivity with a rotatable CD horn, 90° x 60° (hor. x vert.)
- Mounting arm with ball joint for horizontal and vertical alignment, mounting arm M (104 mm) included as standard
- 118 dB max. SPL



The SONA 6 is a very compact passive speaker with a neutral and true-to-detail playback quality. An integrated mounting arm with ball joint enables a very flexible alignment of the speaker. The modern enclosure design blends into the sophisticated design surrounding it.

The SONA 6 is equipped with a 1" dome tweeter with the CD horn of the CA 106 and a 6,5" low-mid chassis. A phase corrected crossover guarantees sound quality that is predominantly constant, even under extreme listening conditions. The nominal coverage of the system is 90° x 60°.

The speaker is available in white or black. Upon request, many special RAL colours are available on requests. With its mounting arm, you can align the system up to 90° horizontally. The Speakon and Phoenix connectors are recessed into the case and are covered with a bolted cover plate so that all disturbing elements are hidden. A safety eyebolt is integrated into the enclosure for connecting a safety rope.

The speaker was especially designed for the integration into artistically demanding settings and blends very well into conference areas, multimedia usages, gastronomy sound systems, and temporary uses, i.e. at trade fair booths. The SONA 6 is suitable for many PA functions in the near field and for decentralised PA systems such as surround, effect, and delay usages.


The systematic implementation of high development goals, the attractive design with the intelligent ball joint mount, and especially the excellent acoustic characteristics qualify the SONA 6 for a variety of usage ranges in modern PA technology.

K&F SONA 6


| | |
|----------------------------------|--|
| Design | Passive 2-way bass reflex system |
| Operation with | K&F PLM+ Series K&F D Series Lab.gruppen IPD 2400 K&F SystemRack ¹ K&F TOPAS ¹ Passive on linear amplifiers |
| Frequency response -10 dB | 65 Hz – 26 kHz 'passive' 86 Hz – 26 kHz 'LCut Mode' 60 Hz – 25 kHz 'FR Mode' |
| Frequency response ±3 dB | 80 Hz – 20 kHz 'passive' 106 Hz – 20 kHz 'LCut Mode' 65 Hz – 20 kHz 'FR Mode' |
| Coverage angles nominal | 90° x 60° (hor. x vert.), rotatable CD horn |
| Power handling nominal | 100 watts |
| Power handling program | 200 watts |
| Power handling peak | 400 watts |
| Max. SPL | 118 dB (SPL peak/1 m) |
| Impedance nominal | 8 Ω |
| Loudspeaker per channel | See matrix |
| Components | 1" dome tweeter plus waveguide 6.5" low-mid frequency chassis |
| Connectors | 2 x speakON® 4-pol. NL4MP (1+/1-) 1 x Phoenix connector (parallel) |
| Enclosure | Design enclosure out of Multiplex, highly resistant structure paint (PU) in RAL 9005 (black) or RAL 9010 (white), safety eyelet for quick chain link, ball joint mounting arm (104 mm) with mounting plate, sunk-in, to the bottom faced and concealed connectors, exchangeable front grille in enclosure colour, rotatable logo |
| Dimensions (W x H x D) | 195 x 366 x 232 mm |
| Weight | 6.8 kg |
| Colour | RAL 9005 (black) RAL 9010 (white) RAL special colour |
| Options | '100 Volt' with 50/100/150 VA transformer (8.5 kg) |
| Accessories | See catalogue or www.kling-freitag.com |

¹ Discontinued in October 2015


Horizontal coverage patter

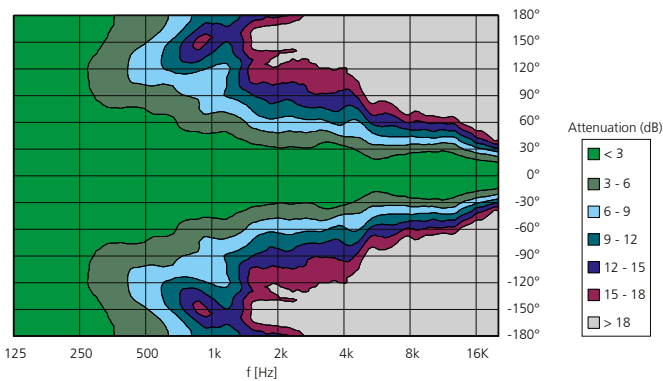


Frequency response 'on axis'

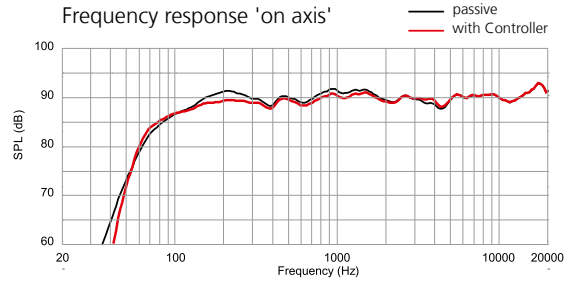

Impedance

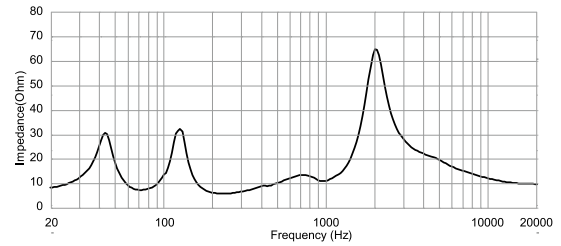

Vertical coverage patter

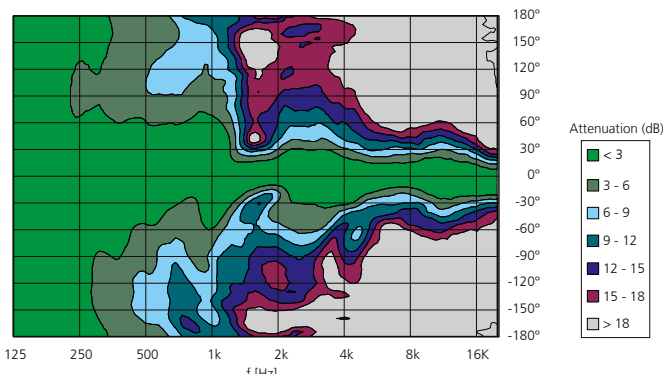

All measurements under free field conditions. Frequency patterns 1/6 octave averaged. The manufacturer reserves the right to make product alterations to improve product quality without prior notice. Errors excepted.

